


DINO





Solid construction made of stainless steel AISI 304 totally resistant to weather conditions.

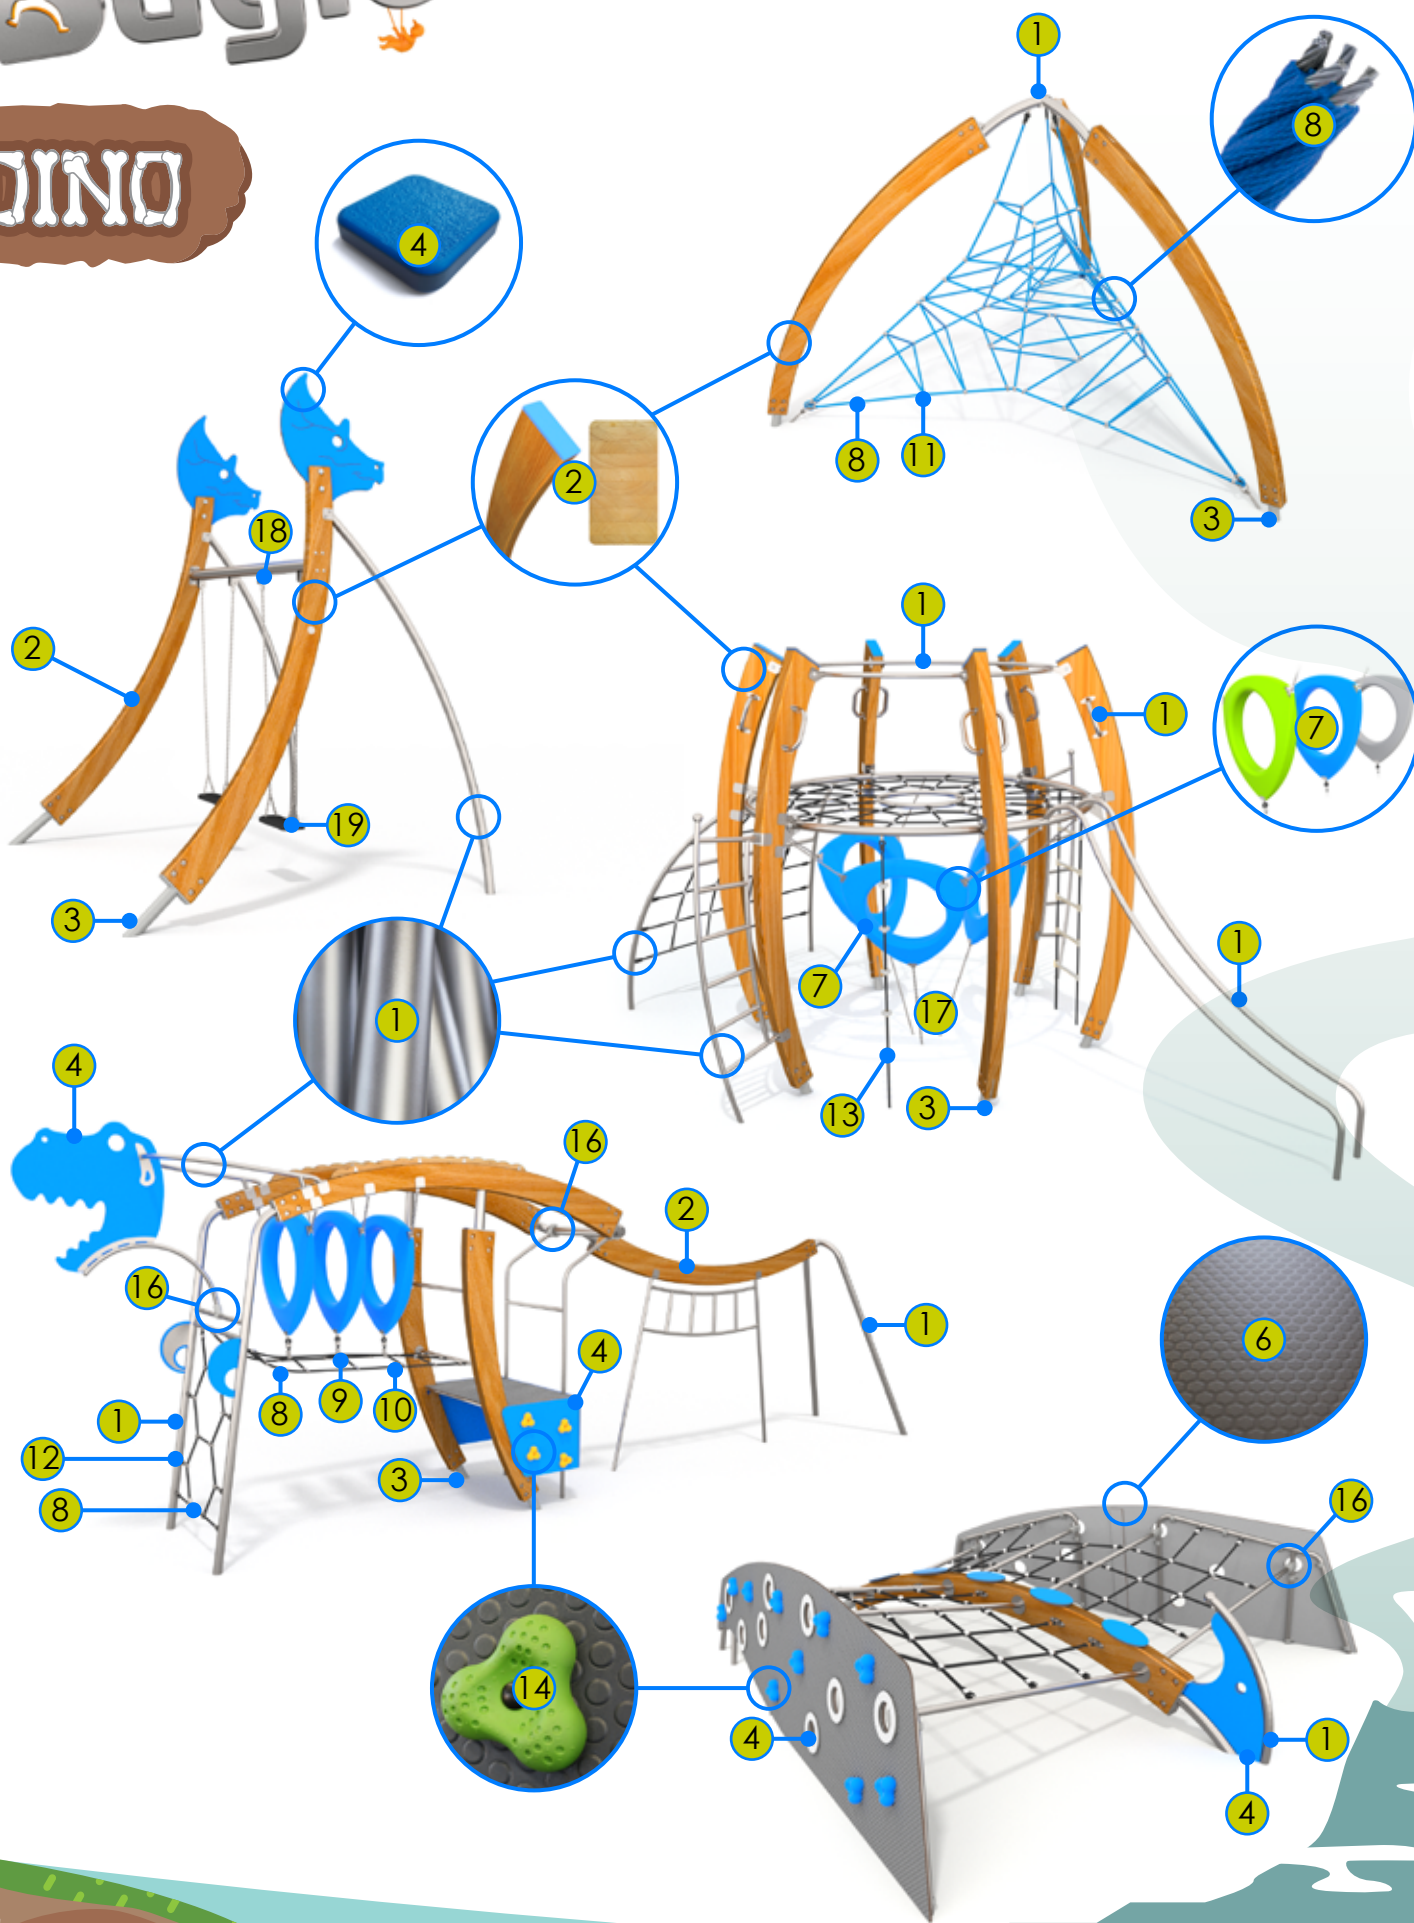

Bended posts made of soft conifer wood 9 cm thick, 26 cm wide and 280 cm long. The wood is glued in layers with polyurethane glues, totally resistant to water. Wood posts processed in three-phased impregnation process.



Solid construction made of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested. 1 – steel, 2 – sandblasting, 3 – iron phosphatizing, 4 – zinc base, 5 – polyester powder paint.



Plates of the walls made of colourful triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.



Plates of the walls and platforms made of colourful 13 mm HPL (black plates made of 8 mm HPL), in the highest quality, totally damp-proof and resistant to UV.



Anti-slip anthracite 10 mm HPL platform plate with a very high resistance to weather conditions and attrition.



Ergonomically-shaped polyethylene rings improving the physical well-being and motor coordination.



Polypropylene ropes pp-multi-split type with a steel core and a diameter of 16 mm.



Solid and esthetic rope connectors made of injection molded polyamide.



Rope endings pressed in a sleeve made of durable aluminum alloy.



Cross connection of ropes clamped in sleeves made of durable aluminum alloys. Used in elements requiring extremely high strength.



Ends of ropes clamped in sleeves made of durable aluminum alloys.



Rope ladder steps and rope knots made of injection molded polyamide.



Climbing rocks made of chip-pings and colourful polyester resin.



Connecting elements like screws, nuts, washers made of stainless steel. Vandal-proof screw plugs made of injection molded polyamide.



System of connectors and clamps made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.



Attested 6 mm stainless steel chains.



Swing slings, with double bearings, made of stainless steel guarantees a quiet mechanism operation. Beside the horizontal movement it also allows the circular movement to avoid a chain twisting.



The seats are made of aluminum construction covered with a soft EPDM rubber, hanged on 6 mm stainless steel chains.



Flexible seat made of reinforced belt covered with soft rubber, hanged on 6 mm stainless steel chains.



"Bird nest" type seat with a diameter of 100 cm, hanged on 6 mm stainless steel chains. Metal frame covered with soft polypropylene rope.



Back support of the seat with steel construction covered with soft polyurethane. Endings made of polyamide.